




EEZEE POWER



**VW Transporter 2024+
Shadow Vision 30\"/>**


**Do not remove the grille
for this installation.**

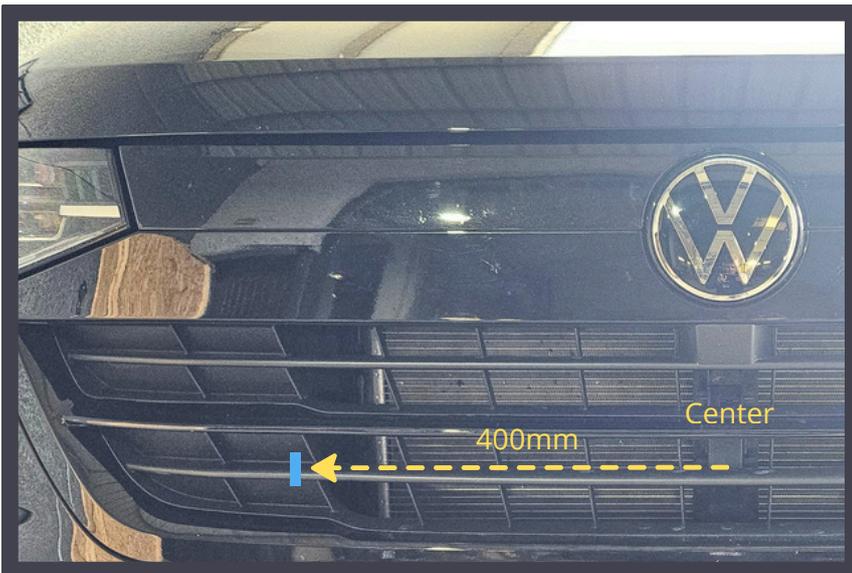

Vertical cut

Define the center of the front grille. Mark a cut line at a distance of 400mm measured from the center of the grille.

Do this on both sides of the grille.

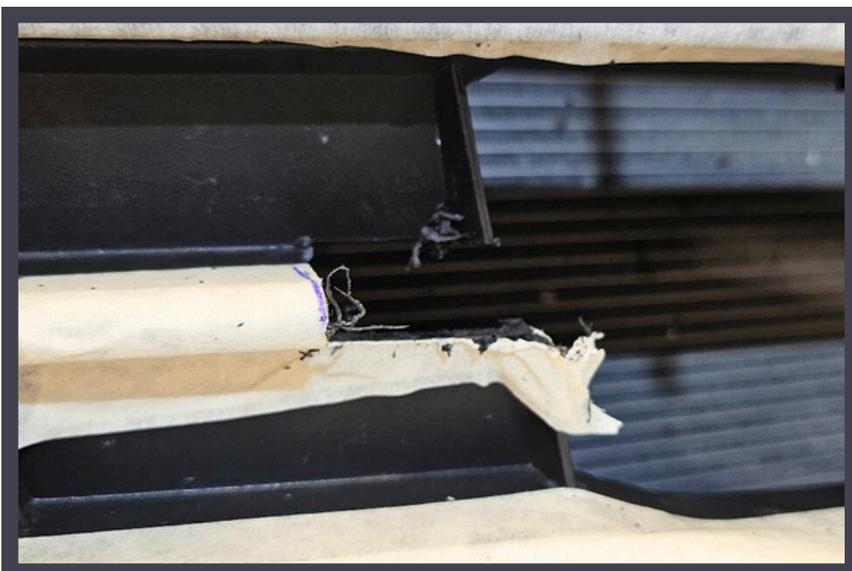

Make the cut with a multi tool.




EEZEE POWER



Horizontal cut

Mark the cut lines as indicated in the pictures.

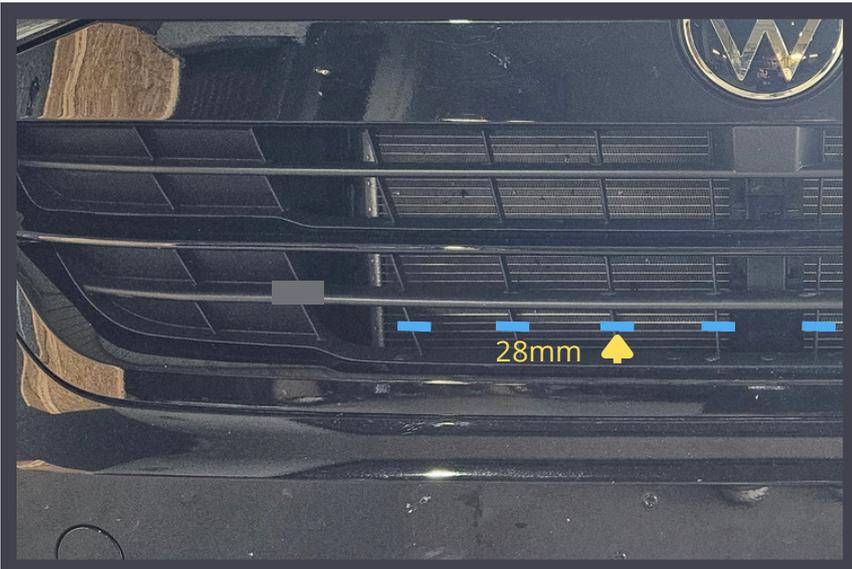

Cut and remove the grille bars.





EEZEE POWER



Put a ruler in the opening between the grille bars.

Mark the cut lines as indicated in the picture.

Do this on both sides of the grille.




Make the cut with a multi tool.



Test fit the light bar. Adjust the cuts if necessary.



EEZEE POWER

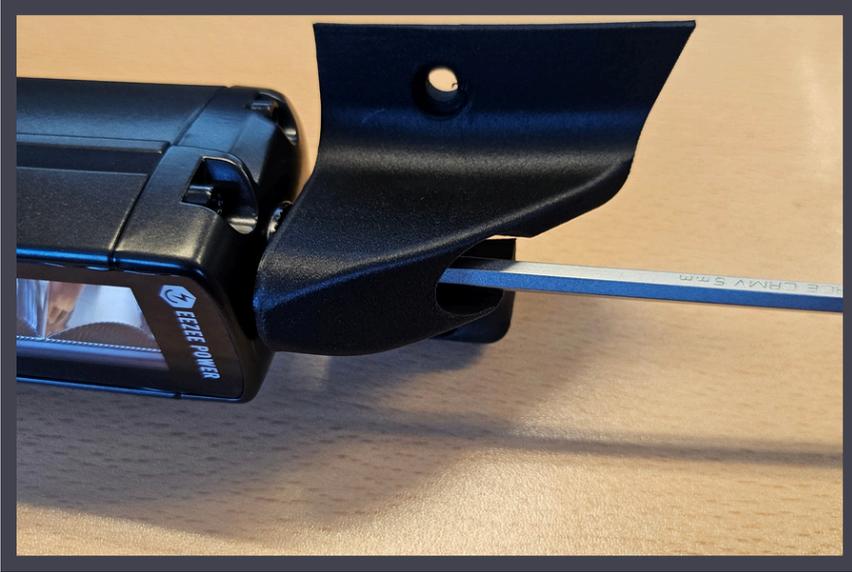

Mount the brackets on the light bar. Use some medium Loctite on the bolts.



Connect the light bar.




EEZEE POWER



Put the light bar with the mounting brackets in place.



Use the supplied screws to fix the brackets to the grille.

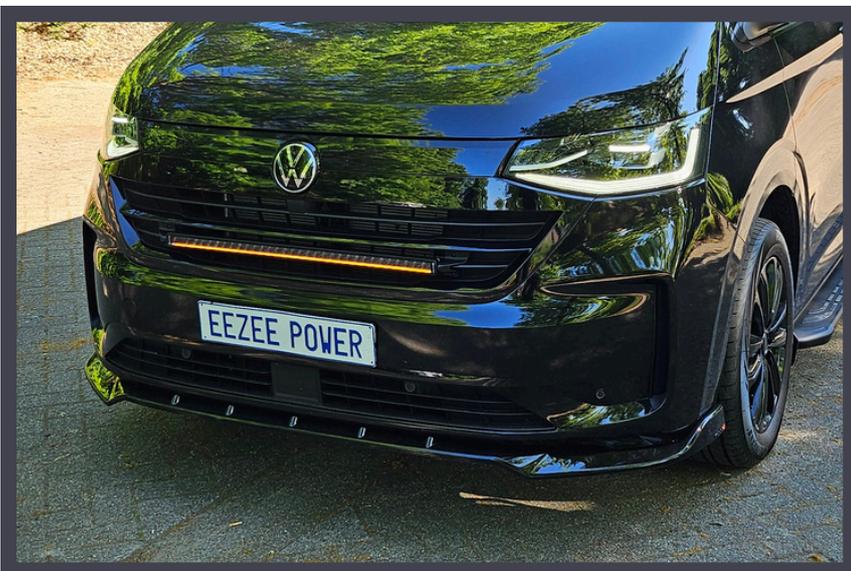

Hooray, this beautiful grille kit has been mounted! Connect the light bar to a switch panel of your choice.



EEZEE POWER

Disclaimer

All information in this guide has been prepared with great care. Although we make every effort to ensure that they are correct, errors may occur. Eezee Power cannot be held liable for errors, changes, outdated information and/or omissions.

This user guide aims to assist you in doing your own installations and is for information purposes only. Eezee Power will not be responsible for any damage caused by the failure to install the product according to these instructions.

If you do not understand the instructions and/or you do not feel confident enough to tackle the installation, you should have the product installed by a professional.

General guidelines

- When handling wiring, always make sure that there is no voltage on the system (e.g. by removing a fuse).
- When running cables under the car, secure them with cable ties every 10 cm.
- Make sure the cables are never under tension. When in doubt, use a longer cable.
- Provide extra protection in damp conditions.
- Always use the correct wire size and correct fuse(s) according to the application.
- Make sure to put the fuse(s) as close to the battery as possible.
- Always check if all connections, fuses and plugs are properly connected.
- Never disconnect the battery from the car! This may reset the car's system completely.

Warranty

Our warranty only applies to manufacturing or design defects and does not cover misuse, modification, improper installation, accident damage, normal wear or finish failure caused by usage of wrong cleaning agents.

Please check the terms and conditions on our website for further details about the warranty procedures.